



AVK FLANGED BEND 11.25°, PN 10/16

712/0110-001

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:

Double flanged bend 11.25° type FFK to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545
- Body of min. GJS-400-15 (GGG-40)
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally



Expect... **AVK**

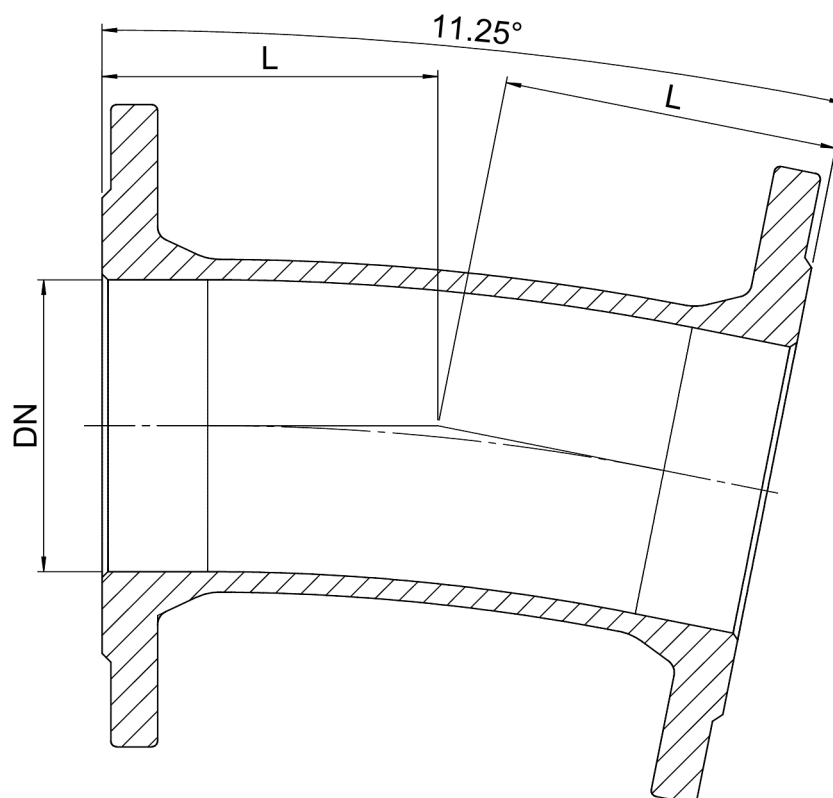

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0040-01-101	40	PN10/16	99	5.8
712-0050-01-101	50	PN10/16	109	7.3
712-0065-01-101	65	PN10/16	124	9.2
712-0080-01-101	80	PN10/16	113	9.1
712-0100-01-101	100	PN10/16	115	10
712-0125-01-101	125	PN10/16	111	15
712-0150-01-101	150	PN10/16	113	16
712-0200-01-100	200	PN10	132	23
712-0200-01-101	200	PN16	132	23
712-0250-01-100	250	PN10	165	35
712-0250-01-101	250	PN16	165	35
712-0300-01-100	300	PN10	175	47
712-0300-01-101	300	PN16	175	47
712-0350-01-100	350	PN10	191	79
712-0350-01-101	350	PN16	191	79
712-0400-01-100	400	PN10	205	101
712-0400-01-101	400	PN16	205	101
712-0500-01-100	500	PN10	135	133
712-0500-01-101	500	PN16	135	133
712-0600-01-100	600	PN10	174	211
712-0600-01-101	600	PN16	174	211