

DONKIN CAST IRON SOFTSEAL VALVE

555

INSTALLATION AND COMMISSIONING INSTRUCTIONS FOR
THE FIG 555 Mk3 TAMPER PROOF DEVICE 80-200




The designs, materials and specifications shown are subject to change without notice due to our continuing programme of product development.

AVK UK Limited



INSTALLATION AND COMMISSIONING INSTRUCTIONS FOR THE FIG 555 Mk3 TAMPER PROOF DEVICE 80-200

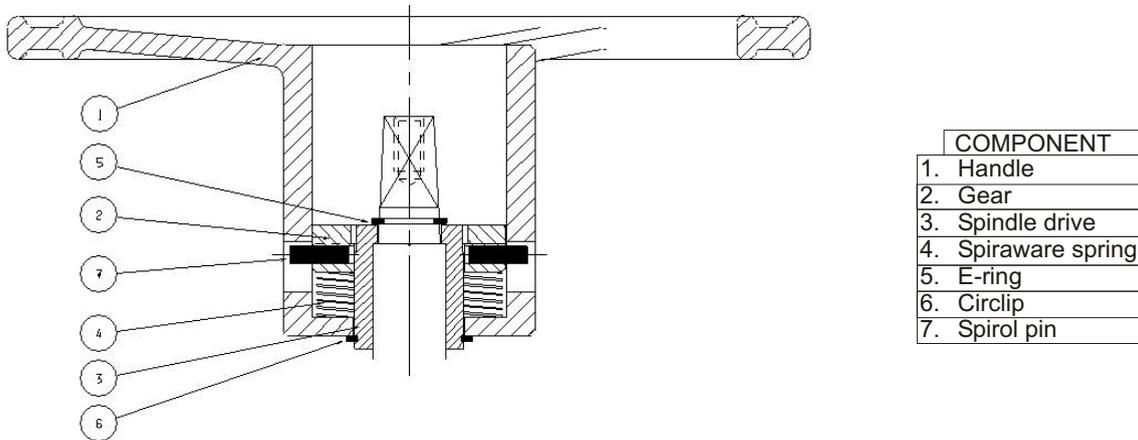

1. Remove the plastic cover fitted in the top of the Handwheel.
2. Place onto the spindle with the flats on the spindle drive lined up with the long flats on the spindle.
3. Fit the E-ring provided into the spindle groove as shown above to hold the device securely in place. (Circlip or long nosed pliers will help this).
4. Fit the red cap back into the Handwheel.

Operating Instructions for the Tamper proof device

1. Rotating the handwheel clockwise will close the valve.
2. Rotate anti-clockwise and the handwheel will run on the ratchet and the spindle will not move.
3. To open the valve remove the plastic cover from the Handwheel and insert a false cap onto the spindle and rotate anti-clockwise.