



POSITION INDICATOR FOR DONKIN SERIES 555 UPTO 300MM

555/881-001

Indicator, polycarbonate

The Donkin Position Indicator has been specially designed for use with the Series 555 valves to provide a simple and cost effective means of identifying whether the valve is in the open or closed position. It can be used both for above ground or underground installations.

When above ground the indication is given by a diagonal scale on the side which moves from right (open) to left (closed). When the valves are used underground the indicator can be viewed from above with a circular hole on the right indicating open and a slot on the left indicating closed.

Product description:

Donkin Position Indicator for Donkin gas valves. Service Conditions: Temperature range: -20°C to + 40°C Post Indicator


Features:

- Simple to fit.
- Vivid red indicator scale.
- Can be retrofitted to valves that are already installed.
- Reduces the need for double stocking of valves.
- Robust design.
- Corrosion resistant materials.



Expect ... **AVR**

DN50-200

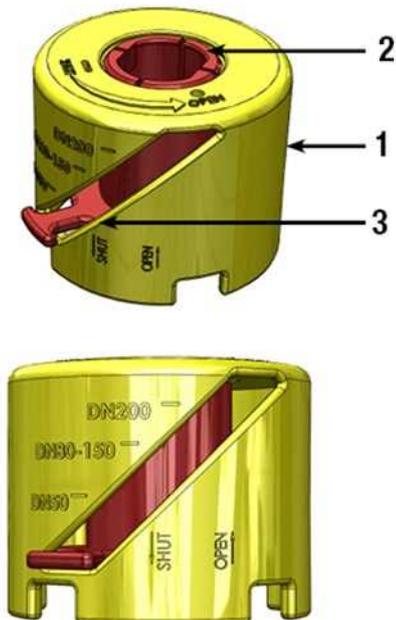

DN250-300



Component list:

1. Housing	Polycarbonate	3. Position indicator	POM
2. Sleeve	POM		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Theoretical weight/kg
555-881-050-02	50-200	0.1
555-881-250-02	250-300	0.1

Comments:

Note: When fitting to a valve the indicator should be in the open position if the valve is open and closed position if the valve is closed.

*Plastic Indicators Fit MKII and MKIII Valves only.

55588105002 is a snap on indicator to fit DN50-200