



AVK COMBINATION AIR VALVE, PN16

701/50-003

For water, ductile iron/reinforced polyamide

AVK combination air valves are combined automatic and air vacuum valves. The automatic air release function releases accumulated air from the system while it is under pressure. The air and vacuum function discharges and admits large volumes of air during the filling or draining of pipelines. The valve will open to relieve negative pressures whenever water column separation occurs.

Product description:

Combination air valve for water and neutral liquids to max. 60°C (temporarily up to 90°C)

Standards:

- Designed according to EN 1074-4
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10

Test/Approvals:

- Hydraulic test according to EN 1074-1, 2 and 4 / EN 12266
- Belgaqua approved material
- Approved according to DIN-DVGW Certificate NW-6215BS5030

Features:

- Orifice sizes:
Air and vacuum DN 50: 794 mm² – automatic 12 mm²
Air and vacuum DN 80: 1809 mm² – automatic 12 mm².
- The enlarged orifice is less exposed to obstruction by debris
- The orifice in the automatic valve releases large volumes of air at high flow rates when the line is under pressure
- The automatic valve's rolling seal mechanism design is less sensitive to different pressures than a direct float seal, thus enabling a one size orifice for a wide pressure range
- Reliable operation reduces water hammer incidents
- Dynamic design allows for high velocity air discharge while preventing premature closure
- Special orifice seat design with a combination of bronze and EPDM rubber ensures long-term maintenance-free operation
- The discharge outlet enables removal of excess fluids
- Air and vacuum air valve with body and cover of ductile cast iron with blue fusion bonded epoxy coating in compliance with DIN 3476 part 1 and EN 14901
- Automatic valve of high-strength composite material
- Float of polycarbonate
- With connection flange or BSP thread
- Working pressure range: 0.2 – 16 bar

Accessories:

Gate valve, butterfly valve, combi-flange, flange adaptor



Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.


COPYRIGHT©AVK GROUP 2020

js - 29-jan-2020 09:13


AVK COMBINATION AIR VALVE, PN16

701/50-003


For water, ductile iron/reinforced polyamide

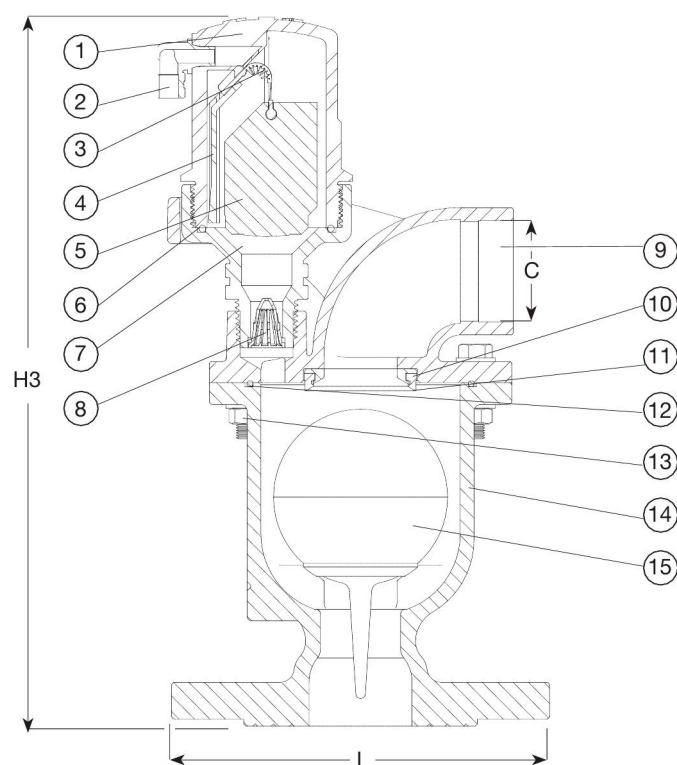

AIR & VACUUM FLOW RATE

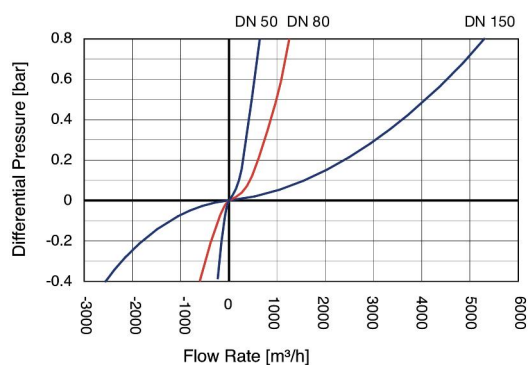

AUTOMATIC AIR RELEASE FLOW RATE

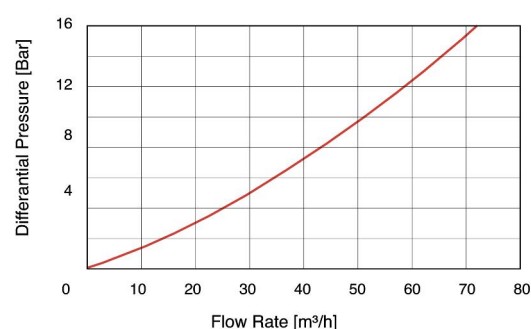

Component list:

1. Body	PA, reinforced	9. Cover	Ductile iron
2. Discharge outlet	PP	10. Orifice seat	Bronze
3. Rolling seal	EPDM rubber	11. Orifice seal	EPDM rubber
4. Clamping key	PA, reinforced	12. O-ring	NBR rubber
5. Float	Foamed PP	13. Bolt assembly	Steel, zinc plated
6. O-ring	NBR rubber	14. Body	Ductile iron
7. Base	PA, reinforced	15. Float	Polycarbonate
8. Strainer mesh	Polyamide		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Connection	Product PN Class	L mm	H3 mm	C mm	Theoretical weight / kg
701-050-50-11003	50	50 MM	PN16	173	293	1½" BSP	6.4
701-051-50-91003	50	2" BSP	PN16	173	306	1½" BSP	4.3
701-080-50-11003	80	80 MM	PN16	211	328	2" BSP	13
701-081-50-91003	80	3" BSP	PN16	205	339	2" BSP	10