



AVK CENTRIC DOUBLE FL. BUTTERFLY VALVE, PN 10/16

75/21-020

Long, fixed EPDM liner, duplex/rilsan coated disc, DN50-1000

AVK centric butterfly valves with fixed liner feature an outstanding seating concept. The rubber is injection moulded directly on the valve body forming a permanent bond. Consequently, there is no risk of deformation or dislocation of the liner making the valves suitable under vacuum conditions. The combination of the profiled disc edge and the excellent AVK rubber quality ensures maximum durability of the liner.

Product description:

Centric butterfly valve with fixed liner - double flanged long - duplex/rilsan coated disc for water and neutral liquids to max. 110°C

Standards:

- Face-to-face dimension according to EN 558 Table 2 Basic Series 14
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Test/Approvals:

- Hydraulic test according to EN 1074-1 and 2 / EN 12266
- Approved according to DIN-DVGW Certificate NW-6201AP2412
- Approved according to KIWA Certificate K 6070/05

Features:

- Bonded vulcanized liner of drinking water approved EPDM with an excellent compression set and thus ability to regain its original shape
- Streamlined disc with minimum flow resistance
- Profiled disc edge requires minimal deformation of the liner to achieve tight sealing, and results in less wear of the liner
- Disc, shaft and conical pin of duplex steel in DN≤200. Disc of rilsan coated ductile iron, and shaft and conical pin of stainless steel in DN≥250
- Shaft bearings of PTFE coated steel
- Top shaft sealing: DN≤350: Bronze bushing with two EPDM O-rings, DN≥400: EPDM O-ring in bushing fixed with countersunk screws of galvanized steel
- Bottom shaft sealing: DN≤350: Plug of galvanized steel with a copper sealing ring, DN≥400: Axial bearing and ring of alubronze and an EPDM O-ring, protected by a cover plate of galvanized steel
- Low torques as a result of the profiled disc edge and fixed liner design
- Ductile iron body with 200 µ epoxy coating blue RAL 5017

Accessories:

Lever, gearbox, pneumatic and electric actuators, universal Supa flange adaptor, dedicated tensile Supa Plus™ flange adaptor for PE/PVC, universal tensile Supa Maxi™ flange adaptor



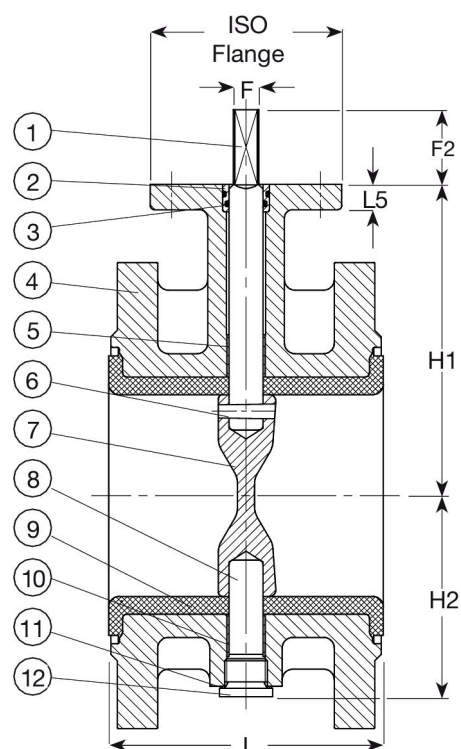


kiwa

Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

COPYRIGHT©AVK GROUP 2019

AVK CENTRIC DOUBLE FL. BUTTERFLY VALVE, PN 10/16**75/21-020****Long, fixed EPDM liner, duplex/rilsan coated disc, DN50-1000****Component list:**

1. Shaft	Duplex steel	10. Bearing	Steel, PTFE coated
2. Bushing	Bronze	11. Seal ring	Copper
3. O-ring	EPDM rubber	12. Plug	Steel, galvanized
4. Body	Ductile iron GJS-400-15 (GGG-40)	13. Screw	Steel, galvanized
5. Bearing	Steel, PTFE coated	14. Ring	Alu-bronze
6. Conical pin	Duplex steel	15. O-ring	EPDM rubber
7. Disc	DN 200 Duplex SS, DN 250 DI	16. Thrust bearing	Alu-bronze
8. Shaft	Duplex steel	17. Cover plate	Steel, galvanized
9. Liner	EPDM rubber	18. Screw	Steel, galvanized

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	H1 mm	H2 mm	F mm	F2 mm	L5 mm	ISO Flange	Theoretical weight / kg
75-0050-21-223002614200 ⁽¹⁾	50	PN10/16	150	118	63	10	34	12	90	11
75-0065-21-223002614200 ⁽¹⁾	65	PN10/16	170	126	71	10	34	12	90	13
75-0080-21-223002614200 ⁽¹⁾	80	PN10/16	180	133	78	10	34	12	90	17
75-0100-21-223002614200 ⁽¹⁾	100	PN10/16	190	147	98	12	34	12	90	20
75-0125-21-223002614200 ⁽¹⁾	125	PN10/16	200	160	109	12	34	12	90	26
75-0150-21-223002614200 ⁽¹⁾	150	PN10/16	210	180	133	16	34	14	90	31
75-0200-21-223001314200 ⁽¹⁾	200	PN10	230	204	158	16	34	14	90	45
75-0250-21-225101314200	250	PN10	250	245	194	24	45	15	125	70
75-0300-21-225101314200	300	PN10	270	270	219	24	45	15	125	90
75-0350-21-225101314200	350	PN10	290	315	256	24	45	15	125	120
75-0400-21-225101314200	400	PN10	310	363	308	30	50	25	175	165
75-0450-21-225101314200	450	PN10	330	388	334	30	50	25	175	200
75-0500-21-225101314200	500	PN10	350	413	360	30	50	25	175	230
75-0600-21-225101314200	600	PN10	390	510	426	40	50	25	175	320
75-0700-21-225101314200	700	PN10	430	560	480	46	60	25	210	420
75-0800-21-225101314200	800	PN10	470	690	635	46	90	30	210	610
75-0900-21-225101314200	900	PN10	510	690	635	60	90	30	300	820

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

AVK CENTRIC DOUBLE FL. BUTTERFLY VALVE, PN 10/16**75/21-020****Long, fixed EPDM liner, duplex/rilsan coated disc, DN50-1000****Reference nos. and dimensions:**

AVK ref. no.	DN	Flange	L	H1	H2	F	F2	L5	ISO	Theoretical
	mm	drilling	mm	mm	mm	mm	mm	mm	Flange	weight / kg
75-1000-21-225101314200	1000	PN10	550	740	685	60	90	30	350	1130
(1) Disc material in duplex										