



## AVK FLANGED REDUCER

712/2210-001

PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

### Product description:


Double flange reducer type FFR to EN 545 for water, waste water and neutral liquids to max. 70° C

### Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

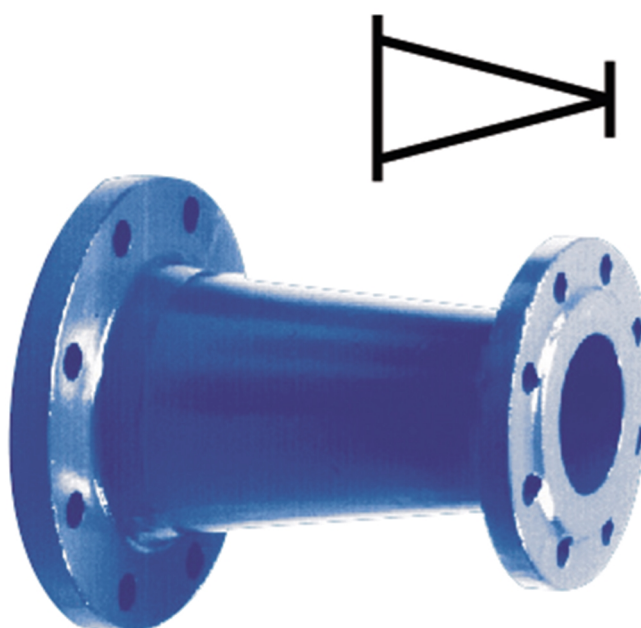

Expect... **AVK**

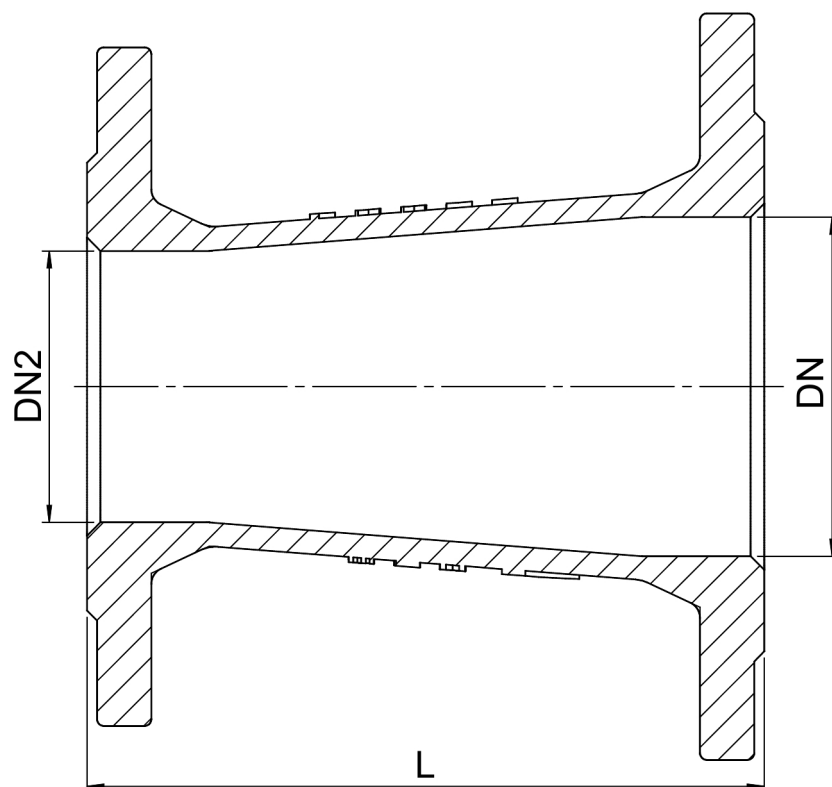
**Component list:**

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	DN2 mm	Flange drilling	L mm	Theoretical weight / kg
712-0051-22-101	50	40	PN10/16	150	5.8
712-0066-22-101	65	50	PN10/16	200	7.0
712-0067-22-101	65	40	PN10/16	200	6.2
712-0081-22-101	80	65	PN10/16	200	8.8
712-0082-22-101	80	50	PN10/16	200	7.1
712-0083-22-101	80	40	PN10/16	200	6.7
712-0101-22-101	100	80	PN10/16	200	9.1
712-0102-22-101	100	65	PN10/16	200	9.8
712-0103-22-101	100	50	PN10/16	200	9.6
712-0104-22-101	100	40	PN10/16	200	9.3
712-0126-22-101	125	100	PN10/16	200	11
712-0127-22-101	125	80	PN10/16	200	10
712-0151-22-101	150	125	PN10/16	200	16
712-0152-22-101	150	100	PN10/16	200	12
712-0153-22-101	150	80	PN10/16	200	15
712-0154-22-101	150	65	PN10/16	200	15
712-0155-22-101	150	50	PN10/16	200	15
712-0201-22-100	200	150	PN10	300	24
712-0201-22-101	200	150	PN16	300	24
712-0202-22-100	200	125	PN10	300	23
712-0202-22-101	200	125	PN16	300	23
712-0203-22-100	200	100	PN10	300	23
712-0203-22-101	200	100	PN16	300	23
712-0204-22-100	200	80	PN10	300	19
712-0204-22-101	200	80	PN16	300	19
712-0251-22-100	250	200	PN10	300	33
712-0251-22-101	250	200	PN16	300	33

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	DN2 mm	Flange drilling	L mm	Theoretical weight / kg
712-0252-22-100	250	150	PN10	300	33
712-0252-22-101	250	150	PN16	300	33
712-0253-22-100	250	125	PN10	300	26
712-0253-22-101	250	125	PN16	300	26
712-0254-22-100	250	100	PN10	300	25
712-0254-22-101	250	100	PN16	300	25
712-0301-22-100	300	250	PN10	300	44
712-0301-22-101	300	250	PN16	300	44
712-0302-22-100	300	200	PN10	300	39
712-0302-22-101	300	200	PN16	300	39
712-0303-22-100	300	150	PN10	300	37
712-0303-22-101	300	150	PN16	300	37
712-0305-22-100	300	100	PN10	300	31
712-0305-22-101	300	100	PN16	300	31
712-0349-22-100	350	300	PN10	300	57
712-0349-22-101	350	300	PN16	300	57
712-0352-22-100	350	250	PN10	300	60
712-0352-22-101	350	250	PN16	300	60
712-0353-22-100	350	200	PN10	300	54
712-0353-22-101	350	200	PN16	300	54
712-0354-22-100	350	150	PN10	300	50
712-0354-22-101	350	150	PN16	300	50
712-0401-22-100	400	350	PN10	300	85
712-0401-22-101	400	350	PN16	300	85
712-0402-22-100	400	300	PN10	300	76
712-0402-22-101	400	300	PN16	300	76
712-0403-22-100	400	250	PN10	300	69
712-0403-22-101	400	250	PN16	300	69
712-0404-22-100	400	200	PN10	300	62
712-0404-22-101	400	200	PN16	300	62
712-0451-22-100	450	400	PN10	300	106
712-0451-22-101	450	400	PN16	300	106
712-0453-22-100	450	300	PN10	300	88
712-0453-22-101	450	300	PN16	300	88
712-0502-22-100	500	400	PN10	600	162
712-0502-22-101	500	400	PN16	600	162
712-0503-22-100	500	350	PN10	600	153
712-0503-22-101	500	350	PN16	600	153
712-0504-22-100	500	300	PN10	600	143
712-0504-22-101	500	300	PN16	600	143
712-0601-22-100	600	500	PN10	600	252
712-0601-22-101	600	500	PN16	600	252
712-0603-22-100	600	400	PN10	600	218
712-0603-22-101	600	400	PN16	600	218