



AVK REDUCER FLANGE

712/3551-002

PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double reducer flange type XR for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.
- Bolts of stainless steel A4 as standard, optionally of stainless steel A2 or Zinc coated steel 8.8.

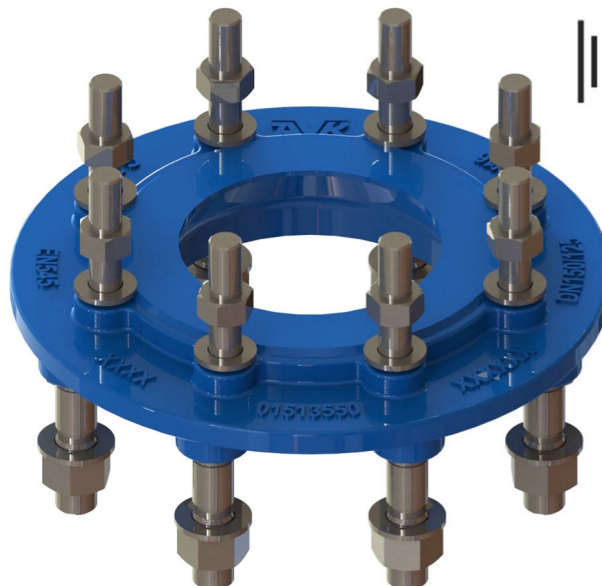

Expect... **AVK**

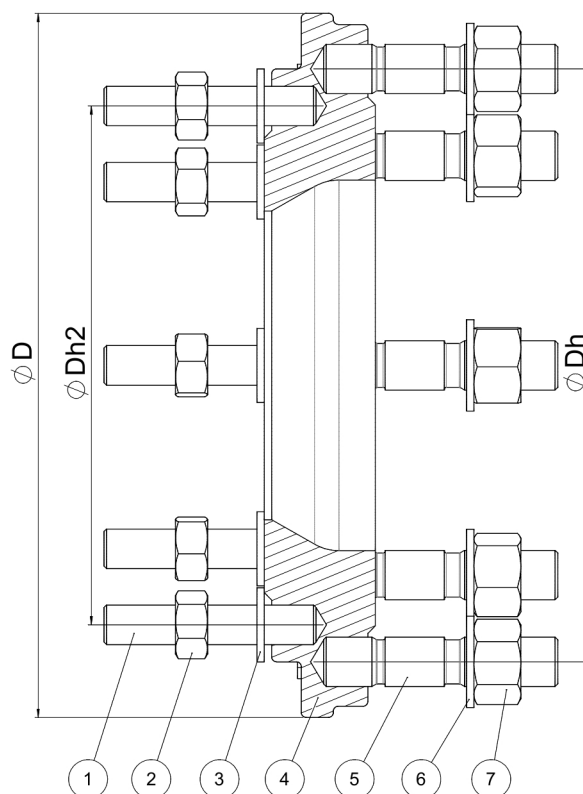
Component list:

1. Stud bolt	Stainless steel A4	5. Stud bolt	Stainless steel A4
2. Nut	Stainless steel A4	6. Washer	Stainless steel A4
3. Washer	Stainless steel A4	7. Nut	Stainless steel A4
4. Body	Ductile iron		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN/DN	Product PN Class	D mm	Dh mm	Dh2 mm	Theoretical weight / kg
712-0061-35-511061	50-60	PN 10/16	175	135	125	6.0
712-0062-35-511061	40-60	PN 10/16	175	135	110	4.9
712-0066-35-511061	50-65	PN 10/16	185	145	125	5.6
712-0067-35-511061	40-65	PN 10/16	185	145	110	5.1
712-0081-35-511061	65-80	PN 10/16	200	160	145	5.0
712-0081-35-512061	65-80	PN 10/16	200	160	145	6.5
712-0082-35-511061	50-80	PN 10/16	200	160	125	5.5
712-0082-35-512061	50-80	PN 10/16	200	160	125	5.7
712-0083-35-511061	40-80	PN 10/16	200	160	110	5.0
712-0083-35-512061	40-80	PN 10/16	200	160	110	5.0
712-0086-35-511061	60-80	PN 10/16	200	160	135	5.1
712-0086-35-512061	60-80	PN 10/16	200	160	135	6.0
712-0101-35-511061	80-100	PN 10/16	220	180	160	8.0
712-0101-35-512061	80-100	PN 10/16	220	180	160	8.0
712-0102-35-511061	65-100	PN 10/16	220	180	145	5.8
712-0103-35-511061	50-100	PN 10/16	220	180	125	5.4
712-0107-35-511061	60-100	PN 10/16	220	180	135	5.6
712-0126-35-511061	100-125	PN 10/16	250	210	180	9.1
712-0127-35-511061	80-125	PN 10/16	250	210	160	7.5
712-0127-35-512061	80-125	PN 10/16	250	210	160	7.5
712-0128-35-511061	65-125	PN 10/16	250	210	145	6.7
712-0133-35-511061	60-125	PN 10/16	250	210	135	6.5
712-0151-35-511061	125-150	PN 10/16	285	240	210	12

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

Reference nos. and dimensions:

AVK ref. no.	DN/DN	Product PN Class	D mm	Dh mm	Dh2 mm	Theoretical weight / kg
712-0152-35-511061	100-150	PN 10/16	285	240	180	8.8
712-0201-35-510061	150-200	PN10	340	295	240	15
712-0201-35-511061	150-200	PN16	340	295	240	15
712-0251-35-510061	200-250	PN10	405	350	295	23
712-0251-35-511061	200-250	PN16	405	355	295	24
712-0301-35-510061	250-300	PN10	460	400	350	29
712-0301-35-511061	250-300	PN16	460	410	355	31
712-0303-35-510061	150-300	PN10	460	400	240	22
712-0303-35-511061	150-300	PN16	460	410	240	23