



AVK BLIND FLANGE W/INTERNAL BSP

712/3910-001

BSP thread 1/2" - 3/4", PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:

Blind flange with internal BSP thread type XI to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:

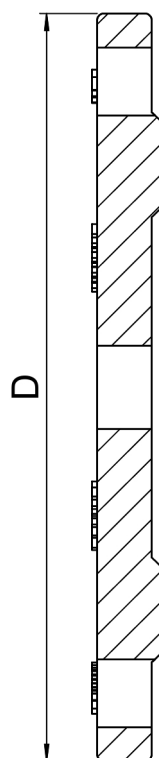
- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.



Expect... **AVK**


Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	D mm	Theoretical weight / kg
712-0040-39-101005 (1)	40	PN10/16	150	1.9
712-0040-39-101075 (2)	40	PN10/16	150	1.9
712-0050-39-101005 (1)	50	PN10/16	165	2.4
712-0050-39-101075 (2)	50	PN10/16	165	2.4
712-0060-39-101005 (1)	60	PN10/16	175	2.7
712-0060-39-101075 (2)	60	PN10/16	175	2.7
712-0065-39-101005 (1)	65	PN10/16	185	3.0
712-0065-39-101075 (2)	65	PN10/16	185	3.0
712-0080-39-101005 (1)	80	PN10/16	200	3.4
712-0080-39-101075 (2)	80	PN10/16	200	3.4
712-0100-39-101005 (1)	100	PN10/16	220	4.2
712-0100-39-101075 (2)	100	PN10/16	220	4.2
712-0125-39-101005 (1)	125	PN10/16	250	5.5
712-0125-39-101075 (2)	125	PN10/16	250	5.5
712-0150-39-101005 (1)	150	PN10/16	285	7.1
712-0150-39-101075 (2)	150	PN10/16	285	7.1
712-0200-39-100005 (1)	200	PN10	340	11
712-0200-39-100075 (2)	200	PN10	340	11
712-0200-39-101005 (1)	200	PN16	340	11
712-0200-39-101075 (2)	200	PN16	340	11
712-0250-39-100005 (1)	250	PN10	400	17
712-0250-39-100075 (2)	250	PN10	400	17
712-0250-39-101005 (1)	250	PN16	400	17
712-0250-39-101075 (2)	250	PN16	400	17
712-0300-39-100005 (1)	300	PN10	455	24
712-0300-39-100075 (2)	300	PN10	455	24
712-0300-39-101005 (1)	300	PN16	455	24

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

AVK BLIND FLANGE W/INTERNAL BSP**712/3910-001****BSP thread 1/2" - 3/4", PN 10/16****Reference nos. and dimensions:**

AVK ref. no.	DN	Flange	D	Theoretical
	mm	drilling	mm	weight / kg
712-0300-39-101075 (2)	300	PN16	455	24
712-0400-39-100005 (1)	400	PN10	565	44
712-0400-39-100075 (2)	400	PN10	565	44
712-0400-39-101005 (1)	400	PN16	580	44
712-0400-39-101075 (2)	400	PN16	580	44
712-0500-39-100005 (1)	500	PN10	670	77
712-0500-39-100075 (2)	500	PN10	670	77
712-0500-39-101005 (1)	500	PN16	715	77
712-0500-39-101075 (2)	500	PN16	715	77
712-0600-39-100005 (1)	600	PN10	780	121
712-0600-39-100075 (2)	600	PN10	780	121
712-0600-39-101005 (1)	600	PN16	840	121
712-0600-39-101075 (2)	600	PN16	840	121

(1) BSP thread 1/2" (15x21)
(2) BSP thread 3/4" (20x27)