



AVK FLANGED PIPE

712/4010-001

100 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

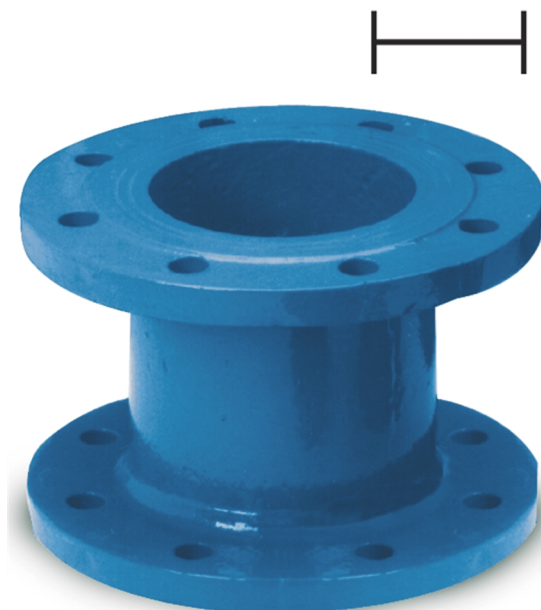

Expect... **AVK**

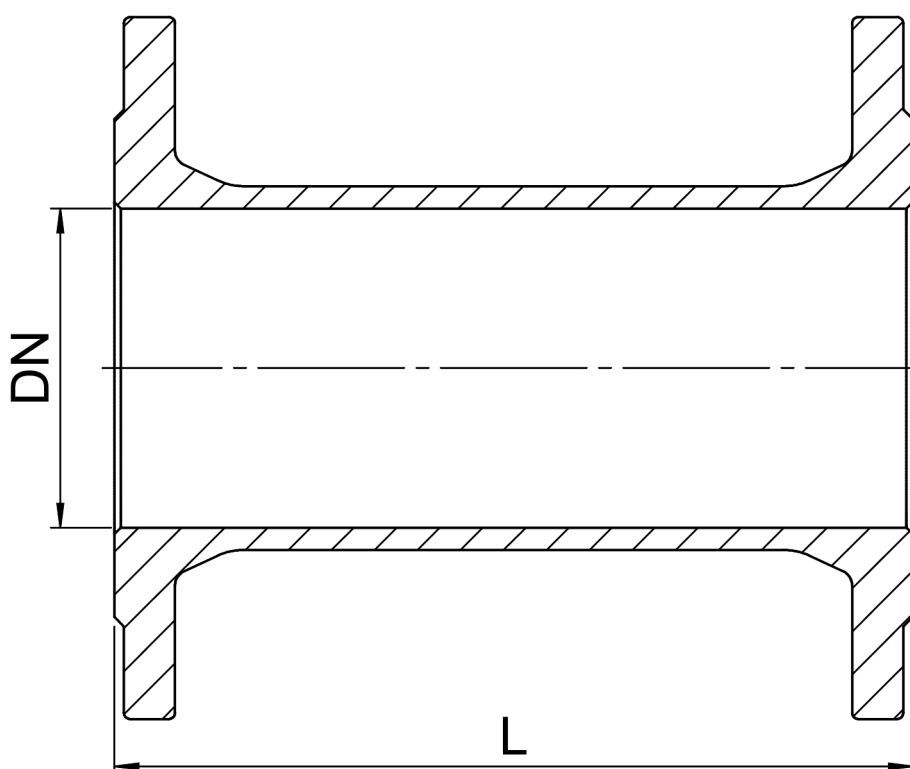
Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0050-40-101	50	PN10/16	100	5.2
712-0060-40-101	60	PN10/16	100	5.7
712-0065-40-101	65	PN10/16	100	6.3
712-0080-40-101	80	PN10/16	100	7.0
712-0100-40-101	100	PN10/16	100	8.2
712-0125-40-101	125	PN10/16	100	10
712-0150-40-101	150	PN10/16	100	14
712-0200-40-100	200	PN10	100	21
712-0200-40-101	200	PN16	100	21
712-0250-40-100	250	PN10	100	25
712-0250-40-101	250	PN16	100	25
712-0300-40-100	300	PN10	100	33
712-0300-40-101	300	PN16	100	33