



AVK FLANGED PIPE

712/4110-001

150 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

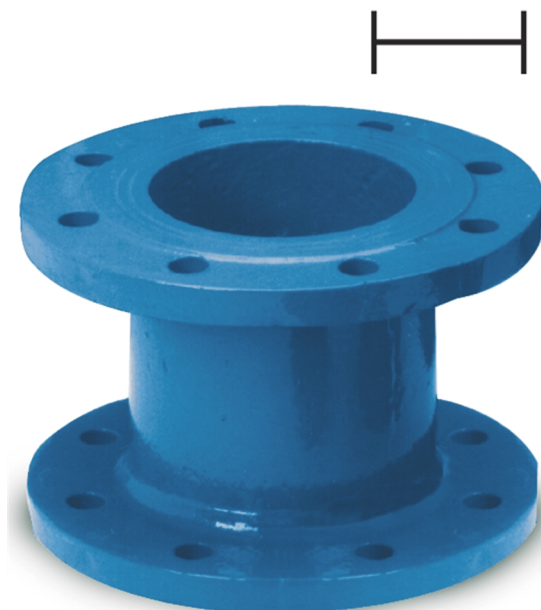

Expect... **AVK**

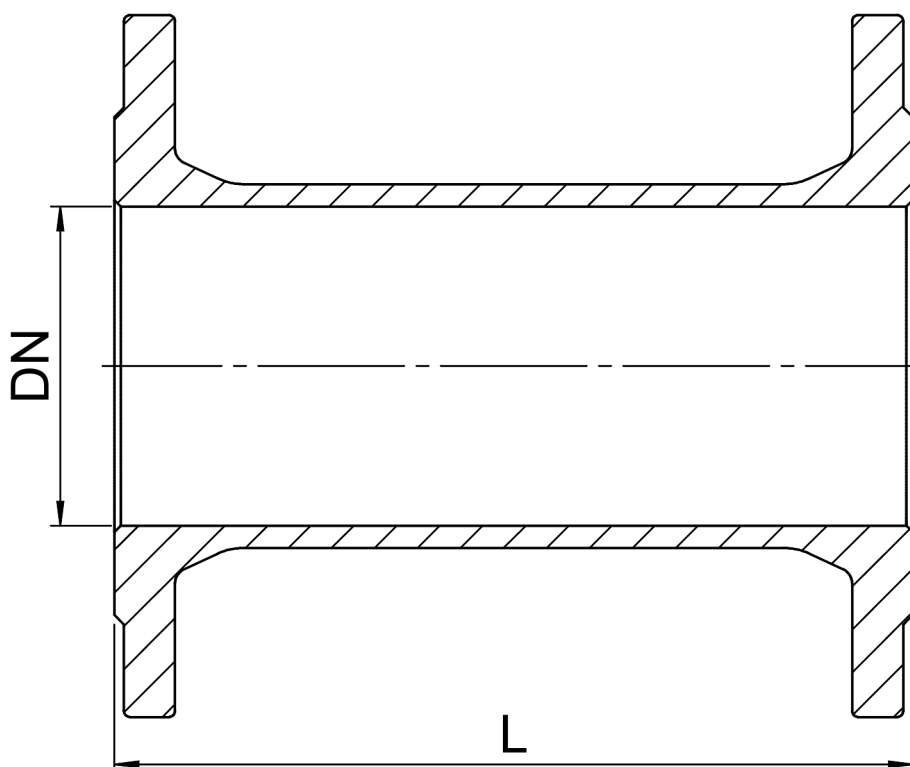
Component list:
1. Fitting
Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0050-41-101	50	PN10/16	150	6.0
712-0060-41-101	60	PN10/16	150	8.0
712-0065-41-101	65	PN10/16	150	7.6
712-0080-41-101	80	PN10/16	150	7.7
712-0100-41-101	100	PN10/16	150	9.0
712-0125-41-101	125	PN10/16	150	11
712-0150-41-101	150	PN10/16	150	14
712-0200-41-100	200	PN10	150	19
712-0200-41-101	200	PN16	150	19
712-0250-41-100	250	PN10	150	27
712-0250-41-101	250	PN16	150	27
712-0300-41-100	300	PN10	150	36
712-0300-41-101	300	PN16	150	36