



AVK FLANGED PIPE

712/4210-001

200 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

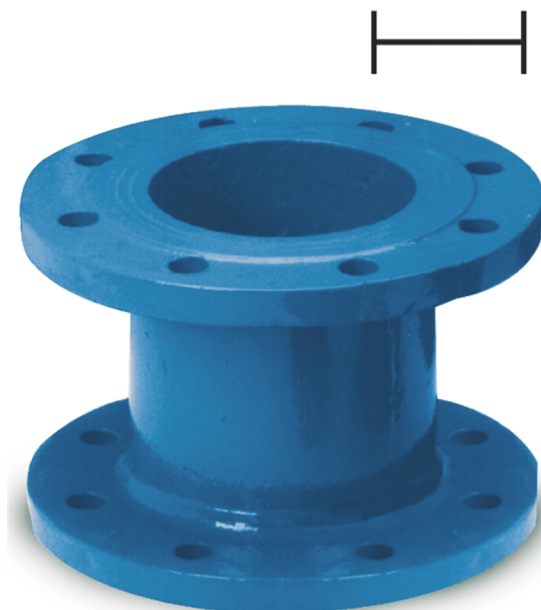

Expect... **AVK**

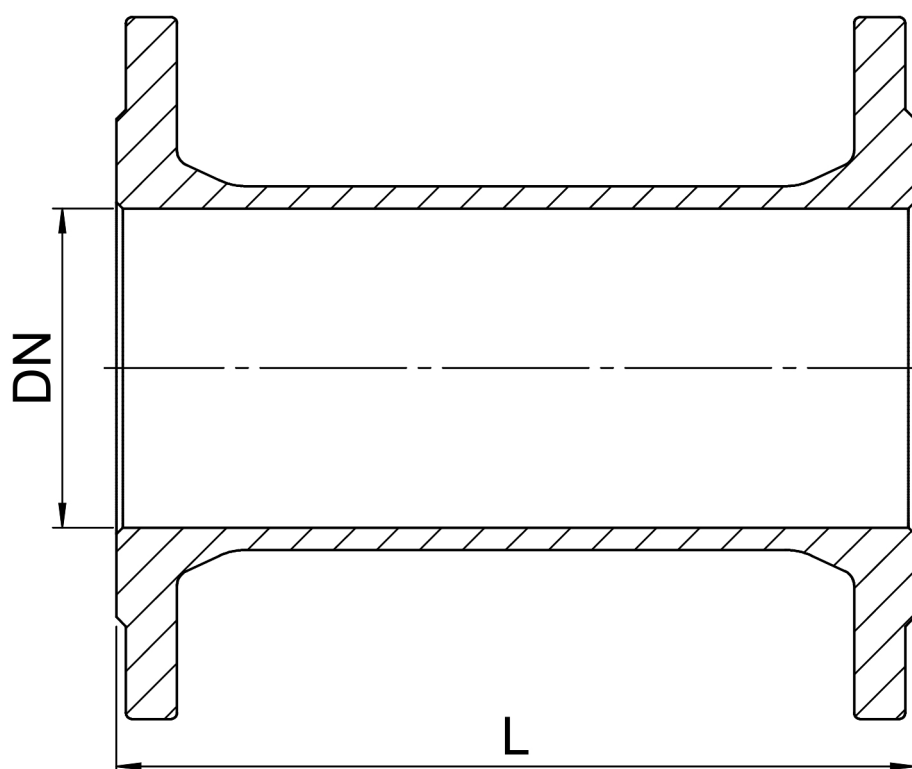AVK FLANGED PIPE**200 MM, PN 10/16****712/4210-001****Component list:**

1. Fitting

Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

| AVK ref. no. | DN mm | Flange drilling | L mm | Theoretical weight / kg |
|-----------------|----------|--------------------|---------|----------------------------|
| 712-0050-42-101 | 50 | PN10/16 | 200 | 6.0 |
| 712-0065-42-101 | 65 | PN10/16 | 200 | 7.4 |
| 712-0080-42-101 | 80 | PN10/16 | 200 | 8.3 |
| 712-0100-42-101 | 100 | PN10/16 | 200 | 9.9 |
| 712-0125-42-101 | 125 | PN10/16 | 200 | 12 |
| 712-0150-42-101 | 150 | PN10/16 | 200 | 15 |
| 712-0200-42-100 | 200 | PN10 | 200 | 26 |
| 712-0200-42-101 | 200 | PN16 | 200 | 26 |
| 712-0250-42-100 | 250 | PN10 | 200 | 29 |
| 712-0250-42-101 | 250 | PN16 | 200 | 29 |
| 712-0300-42-100 | 300 | PN10 | 200 | 38 |
| 712-0300-42-101 | 300 | PN16 | 200 | 38 |