



AVK FLANGED PIPE

712/4410-001

300 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

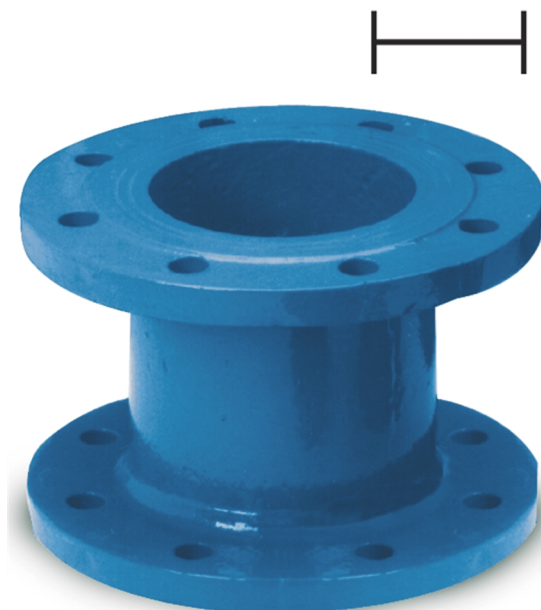

Expect... **AVK**

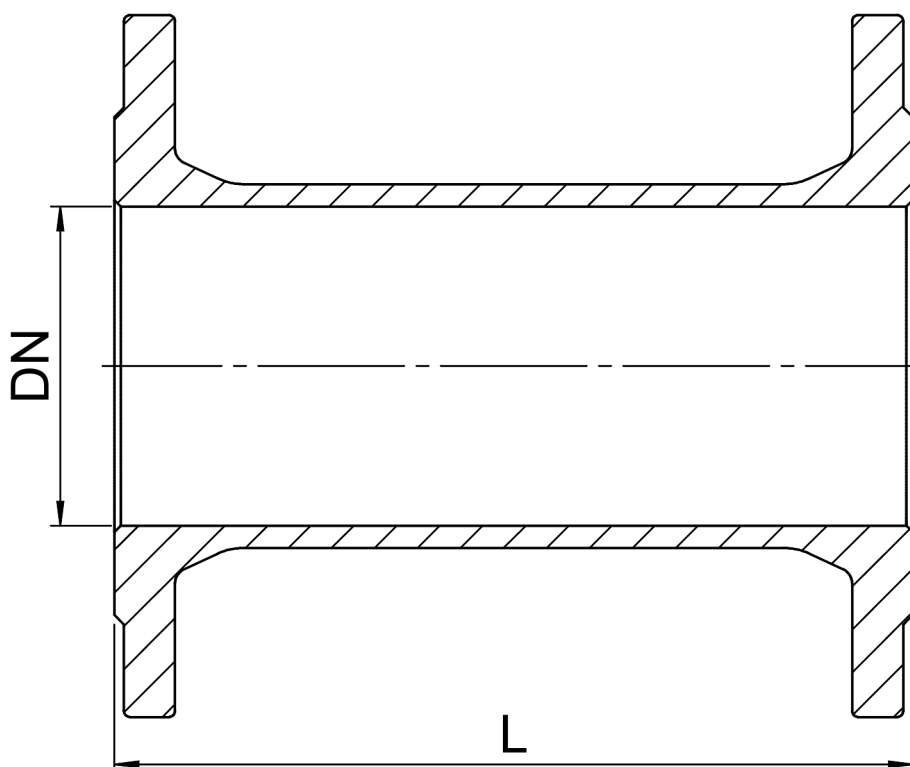
Component list:
1. Fitting

Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0050-44-101	50	PN10/16	300	6.8
712-0065-44-101	65	PN10/16	300	8.4
712-0080-44-101	80	PN10/16	300	9.7
712-0100-44-101	100	PN10/16	300	13
712-0125-44-101	125	PN10/16	300	15
712-0150-44-101	150	PN10/16	300	19
712-0200-44-100	200	PN10	300	27
712-0200-44-101	200	PN16	300	27
712-0250-44-100	250	PN10	300	38
712-0250-44-101	250	PN16	300	38
712-0300-44-100	300	PN10	300	50
712-0300-44-101	300	PN16	300	50