



AVK FLANGED PIPE

712/4910-001

600 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

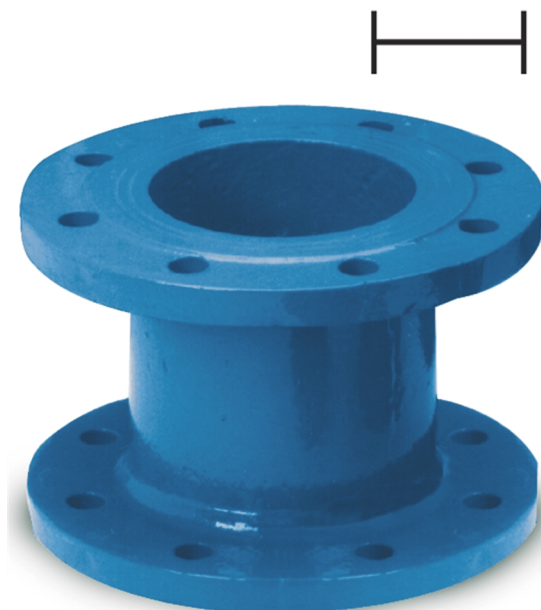

Expect... **AVK**

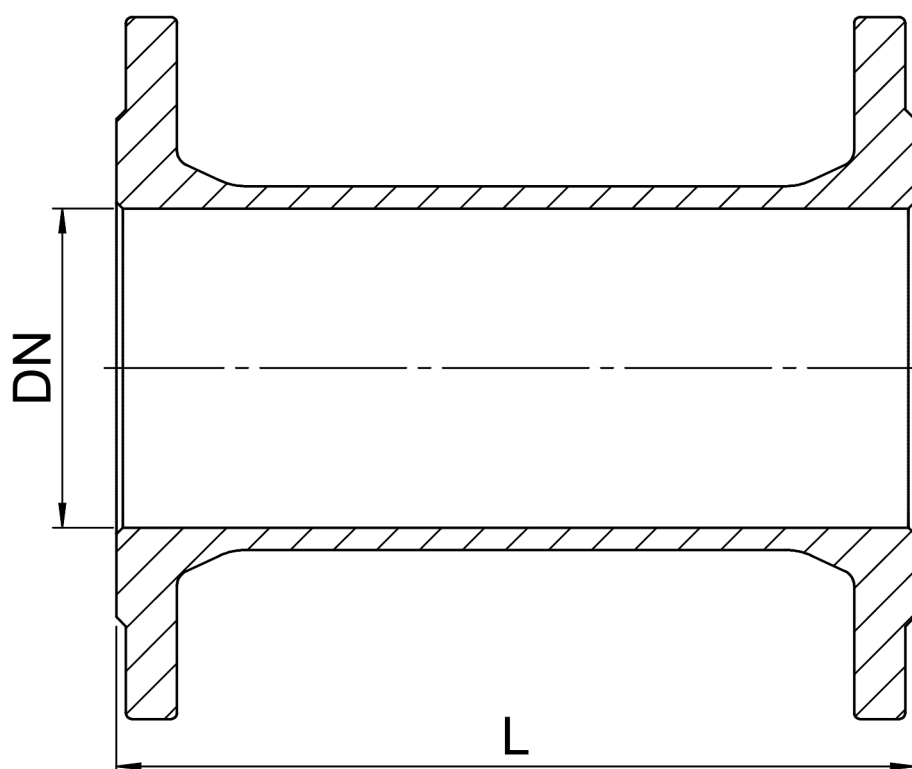
Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0050-49-101	50	PN10/16	600	11
712-0065-49-101	65	PN10/16	600	12
712-0080-49-101	80	PN10/16	600	16
712-0100-49-101	100	PN10/16	600	18
712-0125-49-101	125	PN10/16	600	22
712-0150-49-101	150	PN10/16	600	29
712-0200-49-100	200	PN10	600	41
712-0200-49-101	200	PN16	600	41
712-0250-49-100	250	PN10	600	55
712-0250-49-101	250	PN16	600	55
712-0300-49-100	300	PN10	600	72
712-0300-49-101	300	PN16	600	72
712-0350-49-100	350	PN10	600	100
712-0350-49-101	350	PN16	600	100
712-0400-49-100	400	PN10	600	124
712-0400-49-101	400	PN16	600	124
712-0450-49-100	450	PN10	600	160
712-0450-49-101	450	PN16	600	160
712-0500-49-100	500	PN10	600	188
712-0500-49-101	500	PN16	600	188
712-0600-49-100	600	PN10	600	265
712-0600-49-101	600	PN16	600	265