



## AVK FLANGED PIPE

712/5010-001

700 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

### Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

### Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

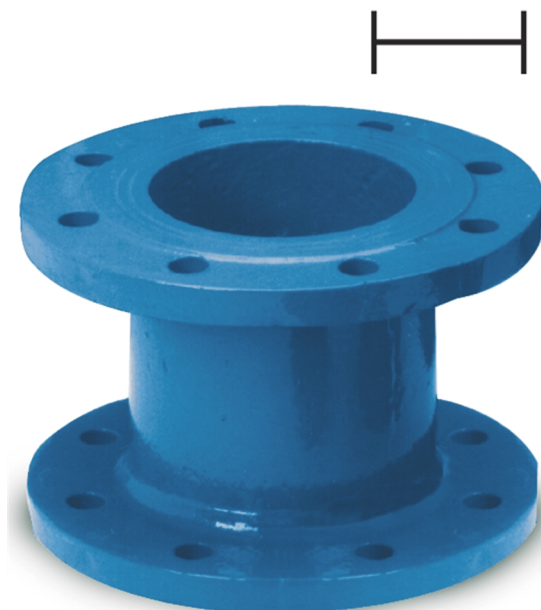

Expect... **AVK**

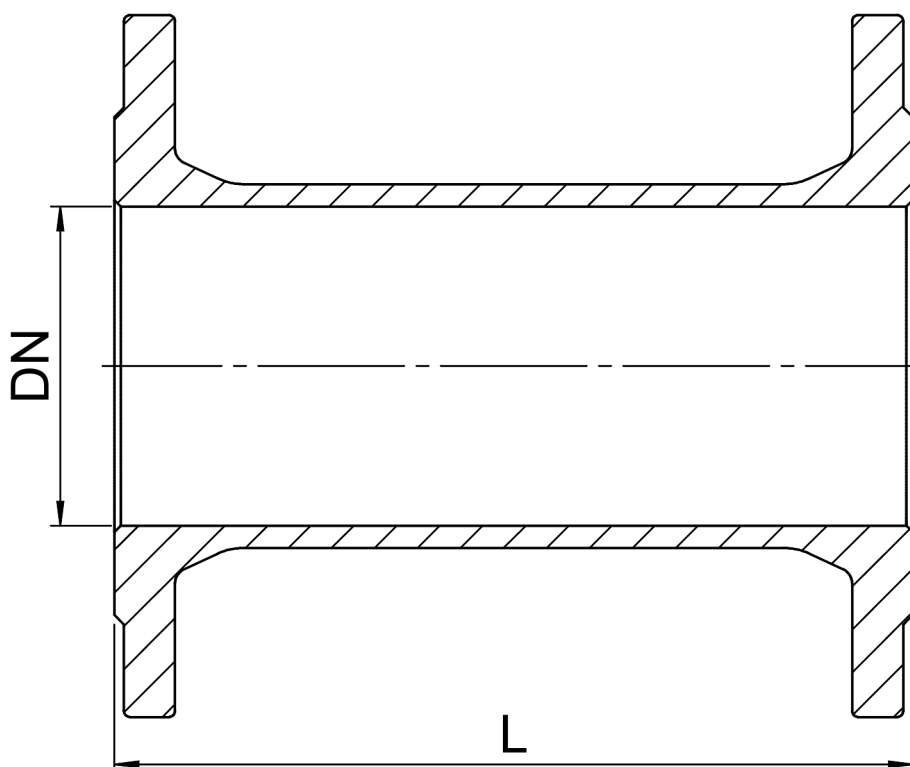
**Component list:**

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0080-50-101	80	PN10/16	700	17
712-0100-50-101	100	PN10/16	700	20
712-0125-50-101	125	PN10/16	700	24
712-0150-50-101	150	PN10/16	700	31
712-0200-50-100	200	PN10	700	45
712-0200-50-101	200	PN16	700	45
712-0250-50-100	250	PN10	700	63
712-0250-50-101	250	PN16	700	63
712-0300-50-100	300	PN10	700	79
712-0300-50-101	300	PN16	700	79
712-0350-50-100	350	PN10	700	109
712-0350-50-101	350	PN16	700	109
712-0400-50-100	400	PN10	700	136
712-0400-50-101	400	PN16	700	136
712-0450-50-100	450	PN10	700	174
712-0450-50-101	450	PN16	700	174
712-0500-50-100	500	PN10	700	204
712-0500-50-101	500	PN16	700	204
712-0600-50-100	600	PN10	700	287
712-0600-50-101	600	PN16	700	287