



AVK FLANGED PIPE

712/5110-001

800 MM, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:


Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

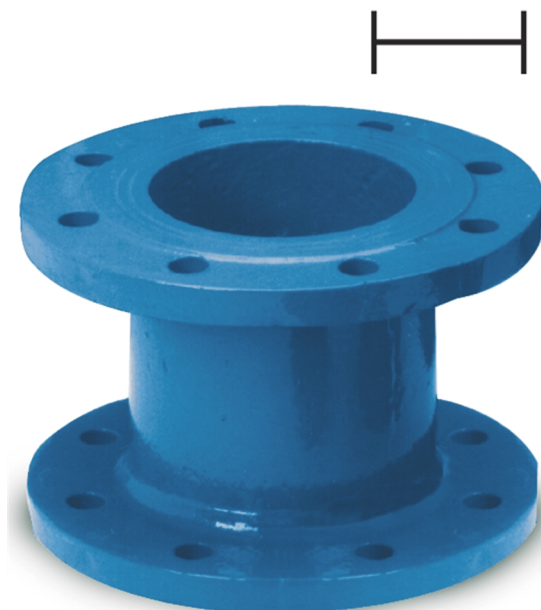

Expect... **AVK**

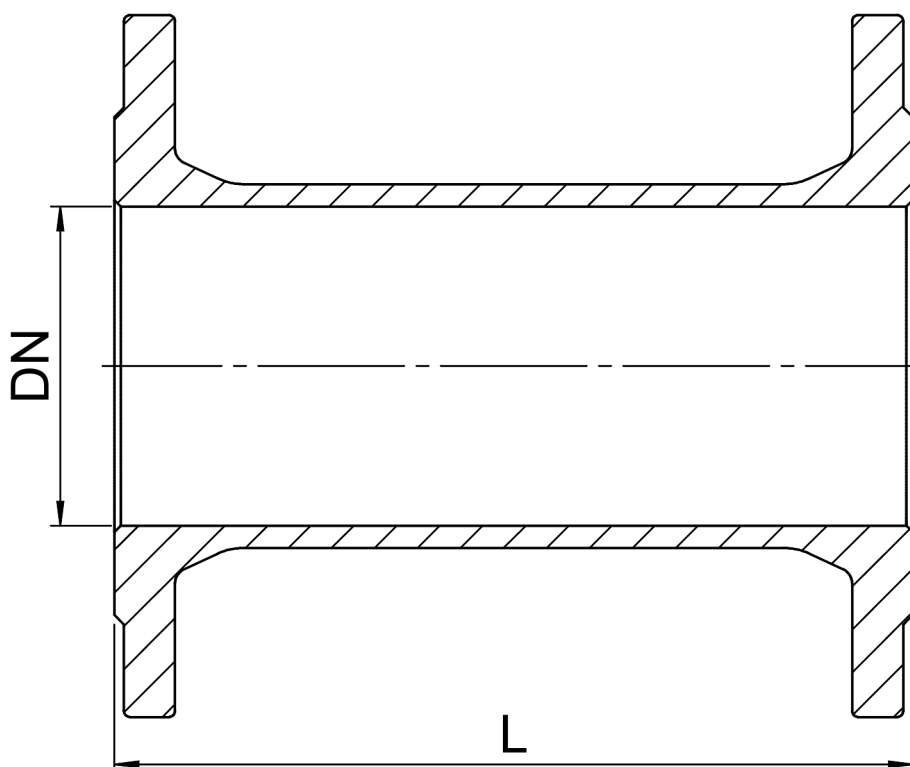AVK FLANGED PIPE**800 MM, PN 10/16****712/5110-001****Component list:**

1. Fitting

Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0080-51-101	80	PN10/16	800	17
712-0100-51-101	100	PN10/16	800	21
712-0125-51-101	125	PN10/16	800	26
712-0150-51-101	150	PN16	800	32
712-0200-51-100	200	PN10	800	45
712-0200-51-101	200	PN16	800	45
712-0250-51-100	250	PN10	800	61
712-0250-51-101	250	PN16	800	61
712-0300-51-100	300	PN10	800	80
712-0300-51-101	300	PN16	800	80
712-0350-51-100	350	PN10	800	119
712-0350-51-101	350	PN16	800	119
712-0400-51-100	400	PN10	800	148
712-0400-51-101	400	PN16	800	148
712-0450-51-100	450	PN10	800	188
712-0450-51-101	450	PN16	800	188
712-0500-51-100	500	PN10	800	221
712-0500-51-101	500	PN16	800	221
712-0600-51-100	600	PN10	800	308
712-0600-51-101	600	PN16	800	308