



## AVK FLANGED PIPE PIPE W/WALL SLEEVE, PN 10/16

712/6010-001

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

### Product description:


Flanged pipe with wall sleeve type FF-WP to EN 545 for water, waste water and neutral liquids to max. 70° C

### Standards:


- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

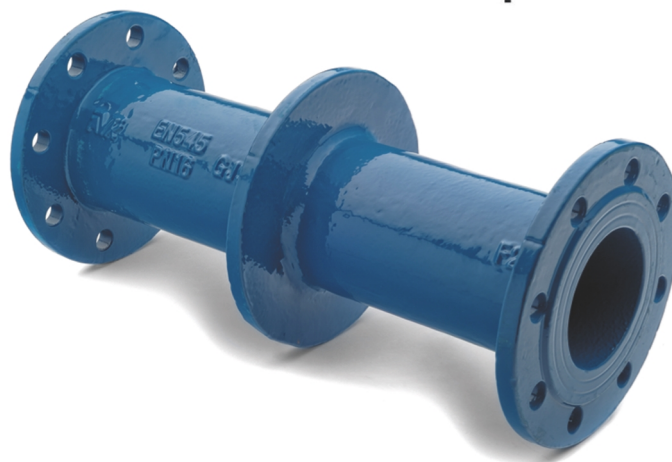

Expect... **AVK**

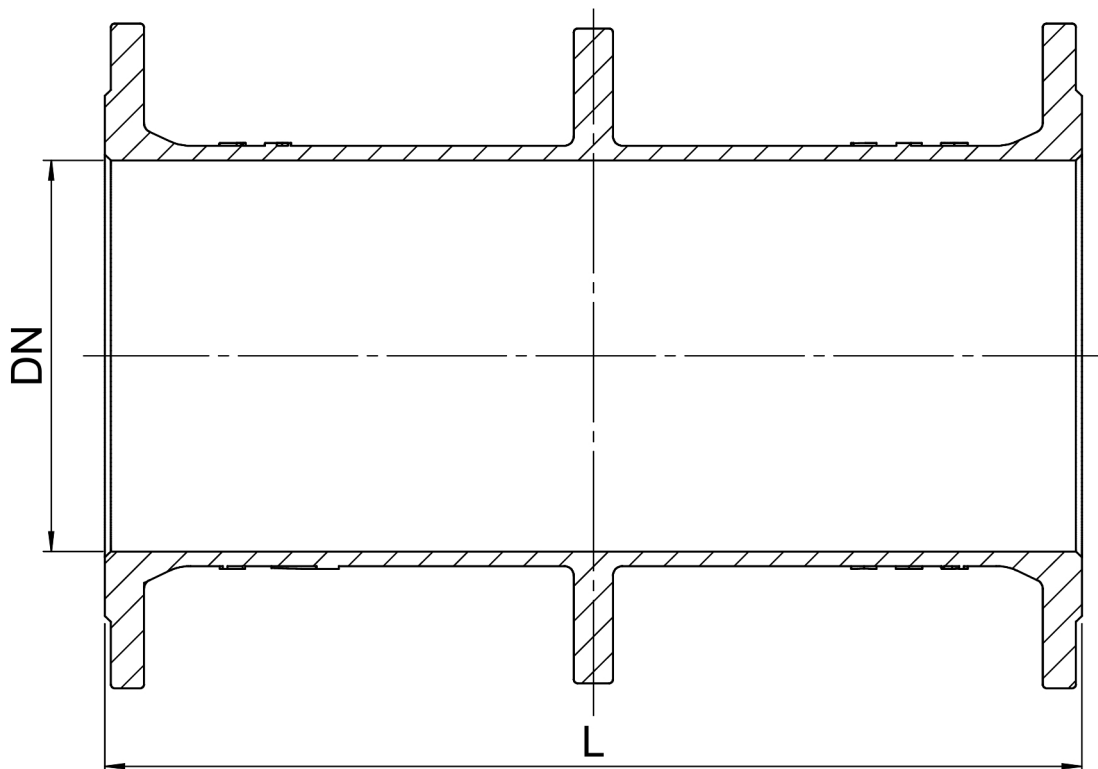

**Component list:**

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference nos. and dimensions:**

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0100-60-101	100	PN10/16	500	21
712-0150-60-101	150	PN10/16	500	32
712-0200-60-100	200	PN10	500	41
712-0200-60-101	200	PN16	500	41
712-0250-60-100	250	PN10	500	63
712-0250-60-101	250	PN16	500	63
712-0300-60-100	300	PN10	500	80
712-0300-60-101	300	PN16	500	80
712-0400-60-100	400	PN10	500	142
712-0400-60-101	400	PN16	500	142
712-0500-60-100	500	PN10	500	221
712-0500-60-101	500	PN16	500	221
712-0600-60-100	600	PN10	500	319
712-0600-60-101	600	PN16	500	319