



## AVK FLANGED PIPE

712/6110

PIPE W/WALL SLEEVE, PN 10/16

001

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

### Product Description:


Flanged pipe with wall sleeve type FF-WP for water, wastewater and neutral liquids to max. 70° C


### Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.



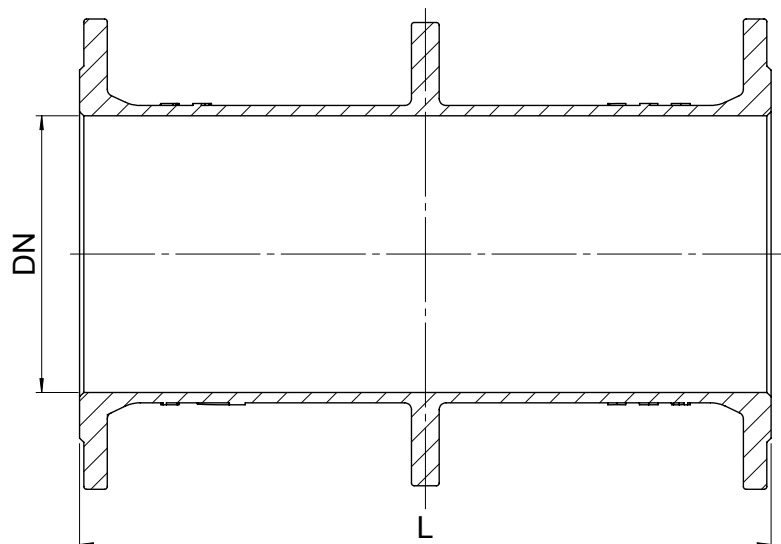
**Component List:**

1. Fitting      Ductile iron

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference Nos. and Dimensions:**

AVK ref. nos	DN mm	Flange drilling	L mm	Theoretic. weight kg
712-0100-61-101	100	PN10/16	1000	31
712-0150-61-101	150	PN10/16	1000	48
712-0200-61-100	200	PN10	1000	67
712-0200-61-101	200	PN16	1000	67
712-0250-61-100	250	PN10	1000	91
712-0250-61-101	250	PN16	1000	91
712-0300-61-100	300	PN10	1000	117
712-0300-61-101	300	PN16	1000	117
712-0400-61-100	400	PN10	1000	201
712-0400-61-101	400	PN16	1000	201
712-0500-61-100	500	PN10	1000	304
712-0500-61-101	500	PN16	1000	304
712-0600-61-100	600	PN10	1000	426
712-0600-61-101	600	PN16	1000	426