



AVK FLANGE/SOCKET WITH MECHANICAL JOINTS, PN16

712/7519-001

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

Product description:

Flanged socket type EU for DI pipes for water, waste water and neutral liquids to max. 70° C

Standards:


- Designed according to EN 545

Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.



Expect... **AVK**

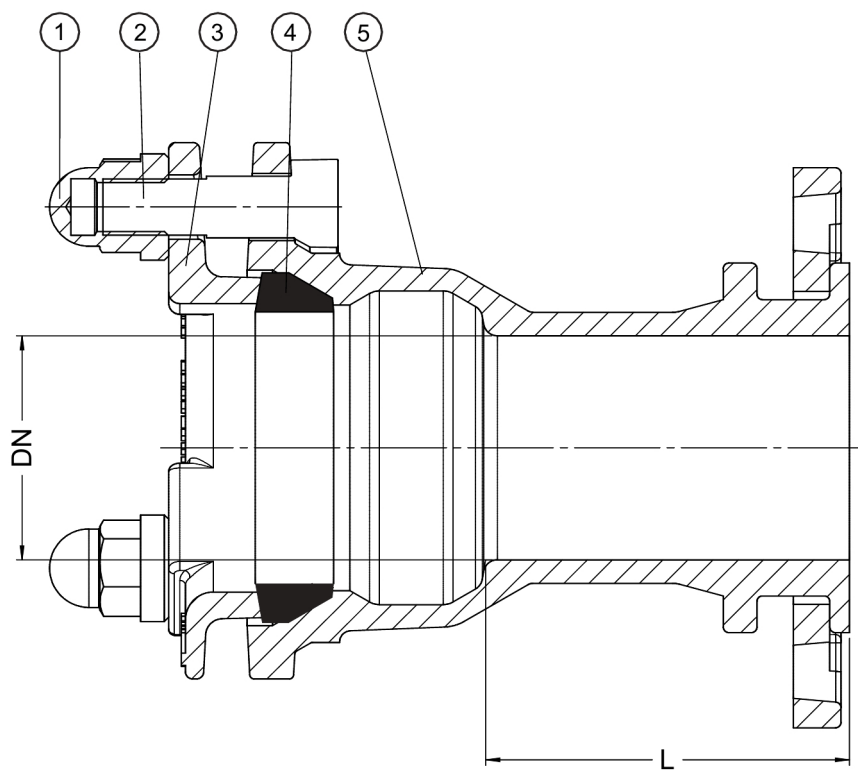

Component list:

1. Nut	Ductile iron	4. Gasket	EPDM rubber
2. Bolt	Ductile iron	5. Body	Ductile iron
3. Gland flange	Ductile iron		

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	L mm	Theoretical weight / kg
712-0060-75-191	60	125	6.9
712-0080-75-191	80	130	8.1
712-0100-75-191	100	130	10.0
712-0125-75-191	125	135	12
712-0150-75-191	150	135	16
712-0200-75-191	200	140	23
712-0250-75-191	250	145	31
712-0300-75-191	300	150	42
712-0350-75-191	350	155	66
712-0400-75-191	400	160	83
712-0500-75-191	500	170	127
712-0600-75-191	600	180	186