



## AVK S-PIECE

712/7520-001

### S-PIECE W/LOOSE FLANGES, PN 10/16

AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.

#### Product description:

S-piece type S with loose flanges to EN 545 for water, waste water and neutral liquids to max. 70° C

#### Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16

#### Test/Approvals:

- Approved according to ACS-France


#### Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.
- Lifting eye for easy handling by lifting equipment.



Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

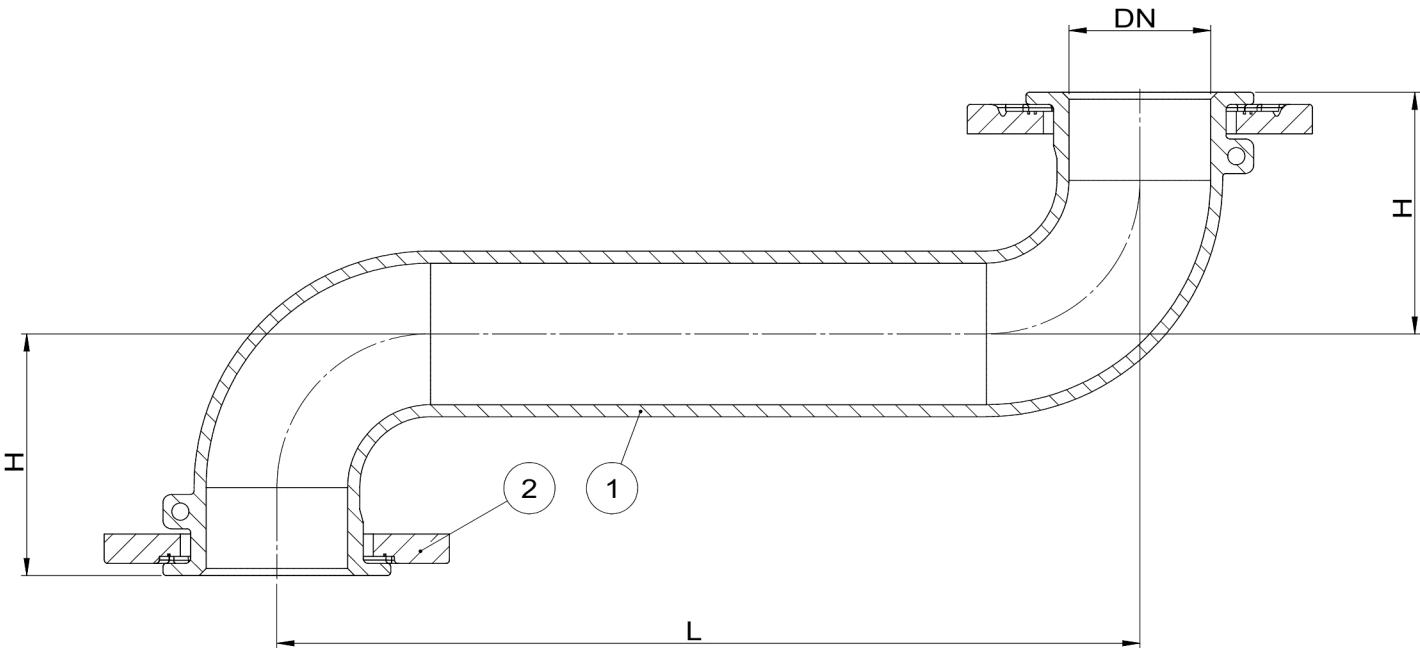

Component list:

1. Body	Ductile iron	2. Loose flange	Ductile iron
---------	--------------	-----------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	H mm	Theoretical weight / kg
712-0080-75-201	80	PN10/16	500	140	15
712-0100-75-201	100	PN10/16	500	150	17
712-0150-75-201	150	PN10/16	500	200	31